
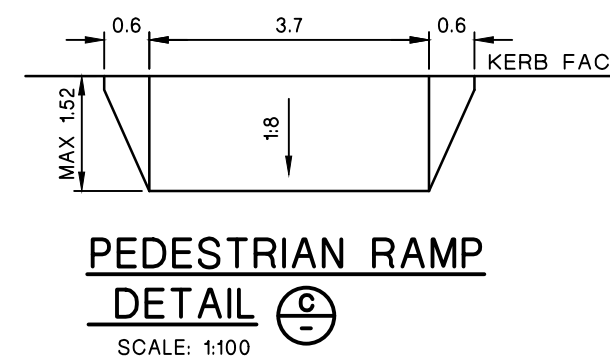


- LEGEND**
- CONSTRUCT MEDIAN INFILL 150mm THICK STENCIL CONCRETE (CCS POTTERY COLOUR OR EQUIVALENT) 32MPa REINFORCED WITH RF82, 40mm COVER TOP
  - CONSTRUCT 200mm THICK 50MPa "ONYX" COLOURED CONCRETE TO RAMP AND RAISED PLATFORM. REFER TO NOTE 7.
  - CONSTRUCT PEDESTRIAN RAMP IN ACCORDANCE WITH DETAIL C.
  - INSTALL SIGN
  - INSTALL POST FOR R3-3 FLAG
  - APPLY 45° DIAGONAL CHEVRON LINEMARKING.
  - APPLY CROSSING MARKING 3.7m LONG 0.60m WIDE, 0.60m GAP USING DEGADUR PAINT. APPLY SEALER PRIOR TO PLACEMENT.
  - BK CONSTRUCT BARRIER KERB TO SD.14
  - CJ CONSTRUCTION JOINT
  - SS CONSTRUCT SUBSOIL DRAIN AND FLUSHING POINT TO SD.4. BACKFILL SUBSOIL DRAIN WITH NO FINES CONCRETE. SEE ALSO SECTION 2.
  - ◇ PROVIDE "Y" RAISED PAVEMENT MARKERS.
  - ◇ PROVIDE "YY" RAISED PAVEMENT MARKERS.
  - △ PROVIDE "R" RAISED PAVEMENT MARKERS.

- NOTES**
- DIMENSIONS ARE IN METRES, UNLESS NOTED OTHERWISE.
  - TAKE EXTREME CARE WHEN WORKING ABOVE EXISTING SERVICES TO AVOID DAMAGE TO SERVICES DUE TO VIBRATION AND LOADING.
  - CONTRACTORS SHALL OBTAIN THEIR OWN 'DIAL BEFORE YOU DIG' INFORMATION, AND ASCERTAIN THE DEPTH OF ALL SERVICES, PRIOR TO WORK COMMENCING.
  - ENSURE STREET LIGHTING MEETS THE REQUIREMENTS OF AS 1158.4.
  - 45° DIAGONAL PAINTED MARKING TO BE 1.0m WIDE, 2.0m GAP.
  - PAINT ALL PROPOSED BARRIER KERBS WHITE.
  - GREY COLOURED CONCRETE SHALL BE OBTAINED BY ADDING 'ONYX' OXIDE, SUPPLIED BY CSR READYMIX. MIX PROPORTION SHALL BE 18kg OF 'ONYX' PER CUBIC METRE OF CONCRETE, MIXED AT BATCH PLANT. ALTERNATE SUPPLIERS WILL BE ALLOWED WHICH MATCH THIS COLOUR.
  - INSTALL POST FOR R3-3 FLAG, AND STOP LINE (TF), AT DESIGNATED CHILDREN'S CROSSINGS, IN ACCORDANCE WITH AS1742.10

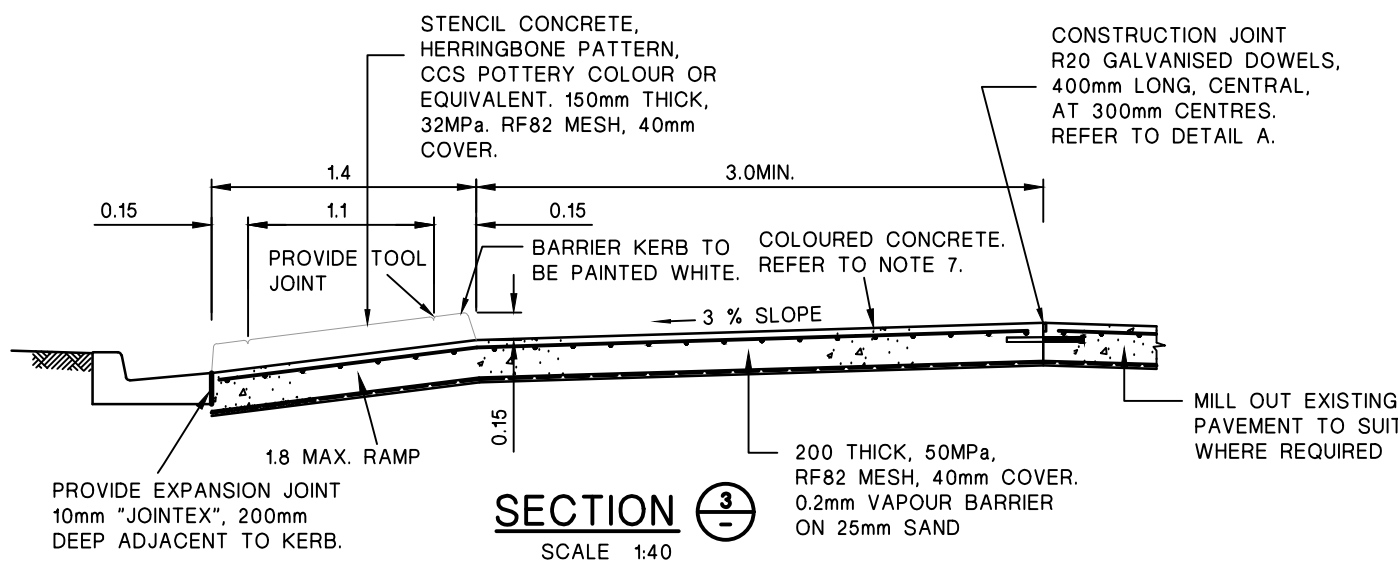

	THE HILLS SHIRE COUNCIL		DATE: JULY 2020
	WOMBAT CROSSING PLAN AND DETAILS		DRAWING No.: <b>SD.27</b>