


PATHWAY STEPS

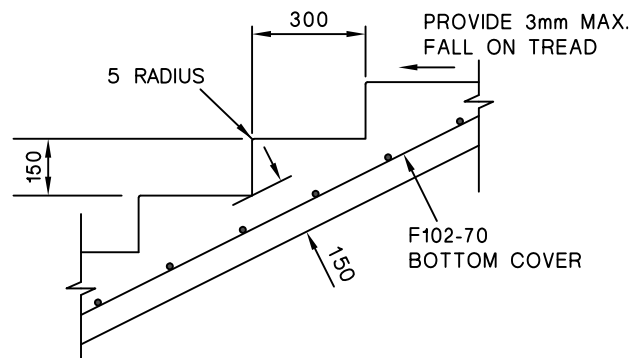

STEP DETAILS

NOTES:

1. STEPS ARE TO BE PROVIDED WHERE GRADE EXCEEDS 16% (i.e. 1:6).
2. MAXIMUM NUMBER OF STEPS PER FLIGHT = 10.
3. MINIMUM NUMBER OF STEPS PER FLIGHT = 2.
4. HANDRAILING SHALL BE PROVIDED IN ACCORDANCE WITH AS1428.1 AND THE NATIONAL CONSTRUCTION CODE WHERE THERE ARE MORE THAN 5 RISERS IN ONE FLIGHT AND LOCATED ON BOTH SIDES OF PATHWAY.
5. HANDRAILING TO BE HOT DIPPED GALVANISED AFTER FABRICATION IN ACCORDANCE WITH AS4680.
6. APPLY TWO (2) COATS OF DULUX "LUXATHANE R" WHITE FINISH.
7. COMPRESSIVE STRENGTH OF CONCRETE (F'c) AT 28 DAYS TO BE 25MPa.
8. TACTILE INDICATORS TO BE PROVIDED IN ACCORDANCE WITH AS1428.1 AND AS1428.4.1.
9. ALL DIMENSIONS ARE IN MILLIMETRES.