


PROVIDE S5 OFF-ROAD PATH
BROKEN SEPARATION LINE.
DASHED LINE 80mm WIDE,
1000m LONG WITH 3000mm
GAP

PROVIDE OFF-ROAD PATH
PAVEMENT SYMBOLS PS-3,
PS-4 & PA-1, AND TO BE 1m
SPACED APART AS SHOWN

CONSTRUCT 2.5m WIDE
SHARED PATH TO THSC
STANDARD DRAWING SD.19

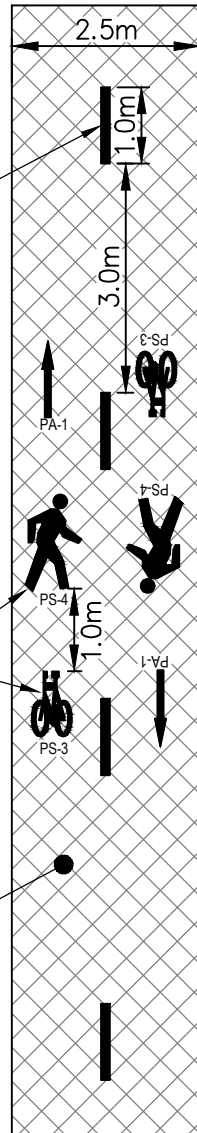


PLAN – MIDBLOCK



ROAD CROSSING

ROADWAY

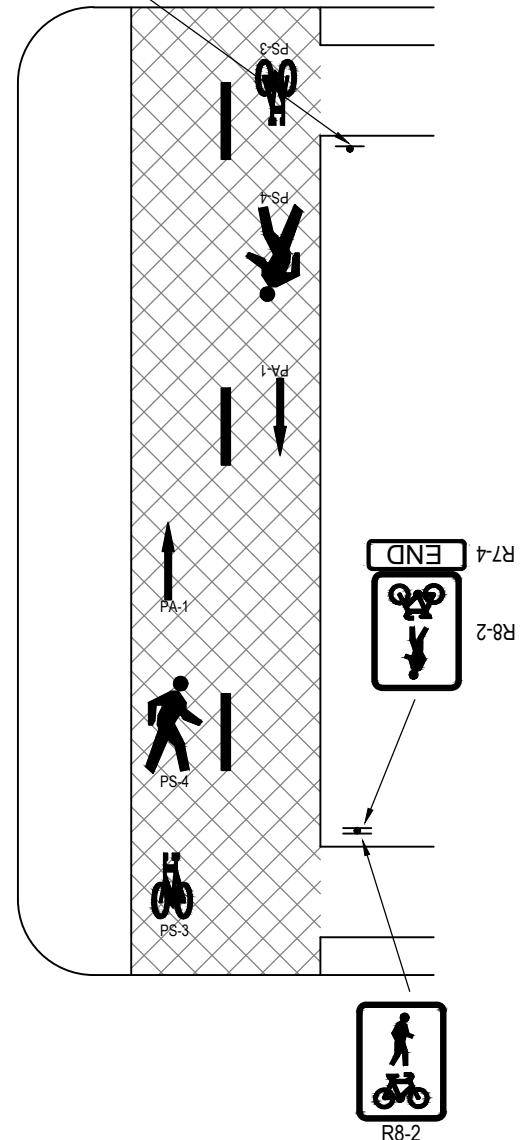

NOTES

1. DIMENSIONS ARE IN METRES, UNLESS NOTED OTHERWISE.
2. ALL LINE MARKING AND SIGNPOSTING TO BE IN ACCORDANCE WITH AUSTRALIAN STANDARD AS1742.9 MANUAL OF UNIFORM TRAFFIC CONTROL DEVICES – BICYCLE FACILITIES.
3. PAVEMENT SYMBOLS TO BE SPACED MINIMUM 70m UNLESS APPROVED BY COUNCIL. MAXIMUM SPACING TO BE 200m.

PLAN – APPROACH TO
ROAD CROSSINGS FOR
PATHS ADJACENT TO ROAD

SHARED PATH LINE MARKING AND PAVEMENT LOGO DETAILS