


PATHWAY STEPS

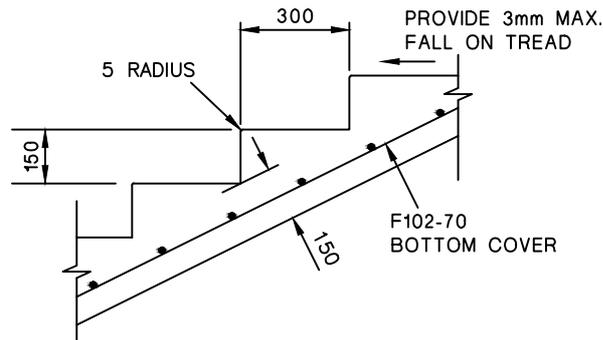

STEP DETAILS

NOTES:

1. STEPS ARE TO BE PROVIDED WHERE GRADE EXCEEDS 16% (i.e. 1:6).
2. MAXIMUM NUMBER OF STEPS PER FLIGHT = 10.
3. MINIMUM NUMBER OF STEPS PER FLIGHT = 2.
4. HANDRAILING SHALL BE PROVIDED WHERE THERE ARE MORE THAN 5 RISERS IN ONE FLIGHT AND LOCATED IN CENTRE OF PATHWAY.
5. HANDRAILING TO BE HOT DIPPED GALVANISED AFTER FABRICATION IN ACCORDANCE WITH AS 1650-1981.
6. APPLY TWO (2) COATS OF DULUX "LUXATHANE R" WHITE FINISH.
7. COMPRESSIVE STRENGTH OF CONCRETE (F'c) AT 28 DAYS TO BE 25MPa.
8. ALL DIMENSIONS ARE IN MILLIMETRES.